

RUNWAY

Built for toughness to handle off road conditions

ENDURO M/T



Mud Terrain



Symmetrical




All Season

⊗ Rim range: **15-16**

⊙ Aspect Ratio: **70-85**

⊕ Speed rating: **Q-S**

LIMITED
5 YEAR
WARRANTY

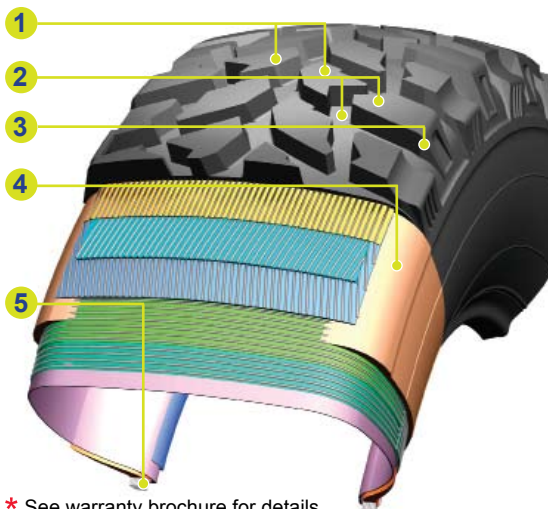

Features

Benefits

1	Aggressive pattern design	▶ Outstanding traction in all conditions
2	High void ratio and pyramidal shaped tread elements	▶ Excellent resistance to aquaplaning and self-cleaning performance
3	Special casing profile and solid shoulder pattern	▶ Enhanced traction and cornering
4	Reinforced casing construction	▶ Superior overall resistance to damage
5	High-tension bead	▶ Excellent load bearing support, steering and cornering

* See warranty brochure for details



ENDURO M/T

Size Range

AR	Tire Size	LI	SR	LR	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 nd	mm	inch	mm	inch	mm	
	LT31X10.50R15	109	Q	C	8 1/2J	7 1/2J;8J;9J	2270	1030	51	350	18	14.6	30.7	781	10.6	268	OWL
	LT33X12.50R15	108	Q	C	10J	8 1/2J;9J;11J	2205	1000	36	250	18	14.6	32.8	832	12.5	318	OWL
70	LT305/70R16	118/ 115	Q	D	9J	8 1/2J;9 1/2J	2910/ 2680	1320/ 1215	51	350	18	14.6	33.1	840	12.0	305	OWL
75	LT235/75R15	104/ 101	S	C	6 1/2J	6JK;6J;7J	1985/ 1820	900/ 825	51	350	18	14.6	29.1	739	9.3	235	OWL
	LT245/75R16	120/ 116	Q	E	7J	6 1/2L;7K;7L; 6 1/2J;7 1/2J	3042/ 2778	1380/ 1260	80	550	18	14.6	30.7	780	9.6	245	OWL
	LT265/75R16	123/ 120	Q	E	7 1/2J	7K;7L;7J;8L;8J	3415/ 3085	1550/ 1400	80	550	18	14.6	31.9	810	10.4	265	OWL
	LT285/75R16	122/ 119	Q	D	8J	7 1/2J;8L;8LB; 8KB; 8 1/2J	3305/ 3000	1500/ 1360	65	450	18	14.6	33.1	840	11.2	285	OWL
85	LT235/85R16	120/ 116	Q	E	6 1/2J	6J;6K;6L; 6 1/2L;7J;7K;7L	3042/ 2778	1380/ 1260	80	550	18	14.6	31.9	810	9.3	235	OWL

LI Load Index SR Speed Rating OWL Outlined While Letter BSW Black Side Wall