



PREMIUM TOURING
80,000 MILE
 Warranty



ENDURO 716



Comfort



Mileage



Fuel efficient




All Season

⊗ Rim range: 14-17

⊙ Aspect Ratio: 60-70

⊙ Speed rating: T-H

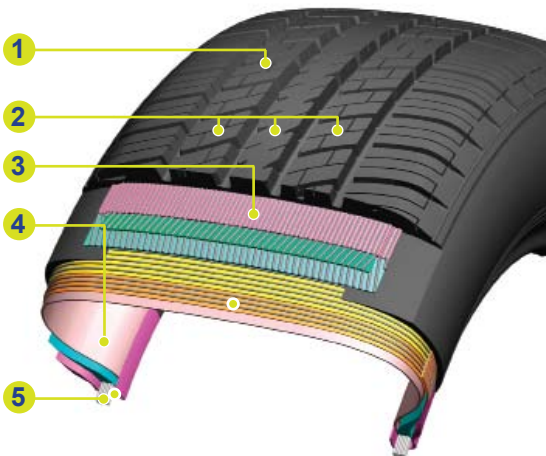

Features	Benefits
1 Special tread compound	▶ Provides long mileage
2 Central circumferential rib	▶ Provides better handling and control
3 Full nylon jointless cap ply	▶ Improves uniformity and tire stability
4 Equal Force Carcass with dimensional stability polyester	▶ Provides comfort and excellent steering response
5 High-tension bead	▶ Provides excellent load bearing, steering and cornering

* See warranty brochure for details



ENDURO 716

Size Range

AR	Tire Size	LI	SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 nd	mm	inch	mm	inch	mm	
60	185/60R14	82	T	620AB	5 1/2J	5J;6J	1047	475	36	250	12	9.0	22.8	578	7.4	189	BSW
	195/60R15	88	H	620AA	6J	5 1/2J;6 1/2J	1235	560	36	250	12	9.1	24.2	615	7.9	201	BSW
	205/60R15	91	H	620AA	6J	5 1/2J;6 1/2J	1356	615	36	250	12	9.2	24.7	627	8.2	209	BSW
	205/60R16	92	H	620AA	6J	5 1/2J;6 1/2J	1389	630	36	250	12	9.2	25.7	652	8.2	209	BSW
	215/60R16	95	H	620AA	6 1/2J	6J;7J	1521	690	36	250	12	9.3	26.1	664	8.7	221	BSW
	225/60R16	98	H	620AA	6 1/2J	6J;7J	1653	750	36	250	12	9.4	26.6	676	9.0	228	BSW
65	185/65R14	86	T	620AB	5 1/2J	5J;6J	1168	530	36	250	12	9.0	23.5	596	7.4	189	BSW
	195/65R15	91	H	620AA	6J	5 1/2J;6 1/2J	1356	615	36	250	12	9.1	25.0	635	7.9	201	BSW
	205/65R15	95	H	620AA	6J	5 1/2J;6 1/2J	1521	690	36	250	12	9.2	25.5	647	8.2	209	BSW
	215/65R17	99	T	620AB	6 1/2J	6J;7J;7 1/2J	1709	775	36	250	9.3	9.3	28.4	712	8.7	221	BSW
70	185/70R14	88	T	620AB	5 1/2J	5J;6J	1235	560	36	250	12	9.2	24.3	616	7.4	189	BSW
	195/70R14	91	T	620AB	6J	5 1/2J;6 1/2J	1356	615	36	250	12	9.1	24.8	630	7.9	201	BSW
	205/70R15	96	H	620AA	6J	5 1/2J;6 1/2J	1565	710	36	250	11	8.8	26.3	669	8.2	209	BSW
	215/70R15	98	H	620AA	6 1/2J	6J;7J	1653	750	36	250	11	8.9	26.9	683	8.7	221	BSW

LI Load Index SR Speed Rating BSW Black Side Wall